

Creating DEMs From LiDAR Point Cloud Data

C. Crosby

(ccrosby@sdsc.edu)

San Diego Supercomputer Center /
OpenTopography.org

Ramon Arrowsmith

SESE, ASU

2011 SCEC LiDAR Short Course

Digital Elevation Models


- Digital representation of topography / terrain
 - “Raster” format – a grid of squares or “pixels”
 - Continuous surface where Z (elevation) is estimated on a regular X,Y grid
 - “2.5D”


0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	0
0	50	100	100	100	100	100	100	100	100	100	100	100	100	100	50	0
0	50	100	150	150	150	150	150	150	150	150	150	150	150	150	100	50
0	50	100	150	200	200	200	200	200	200	200	200	200	200	150	100	50
0	50	100	150	200	250	250	250	250	250	250	250	250	200	150	100	50
0	50	100	150	200	250	300	300	300	300	300	300	250	200	150	100	50
0	50	100	150	200	250	300	350	350	350	300	250	200	150	100	50	0
0	50	100	150	200	250	300	350	400	350	300	250	200	150	100	50	0
0	50	100	150	200	250	300	350	350	350	300	250	200	150	100	50	0
0	50	100	150	200	250	300	300	300	300	300	250	200	150	100	50	0
0	50	100	150	200	250	250	250	250	250	250	250	200	150	100	50	0
0	50	100	150	200	200	200	200	200	200	200	200	200	150	100	50	0
0	50	100	150	150	150	150	150	150	150	150	150	150	150	150	100	50
0	50	100	100	100	100	100	100	100	100	100	100	100	100	100	100	50
0	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	0
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Source: <http://www.ncgia.ucsb.edu/giscc/extra/e001/e001.html>


- Grid resolution is defined by the size in the horizontal dimension of the pixel
 - 1 meter DEM has pixels 1 m x 1m assigned a single elevation value.

- 1 meter grid
- LiDAR returns from EarthScope data collection
- Example from flat area with little or no vegetation so ground is sampled approx. 5+ times per square meter
- How do we best fit a continuous surface to these points?
- Ultimately wish to represent irregularly sampled data on a regularized grid.

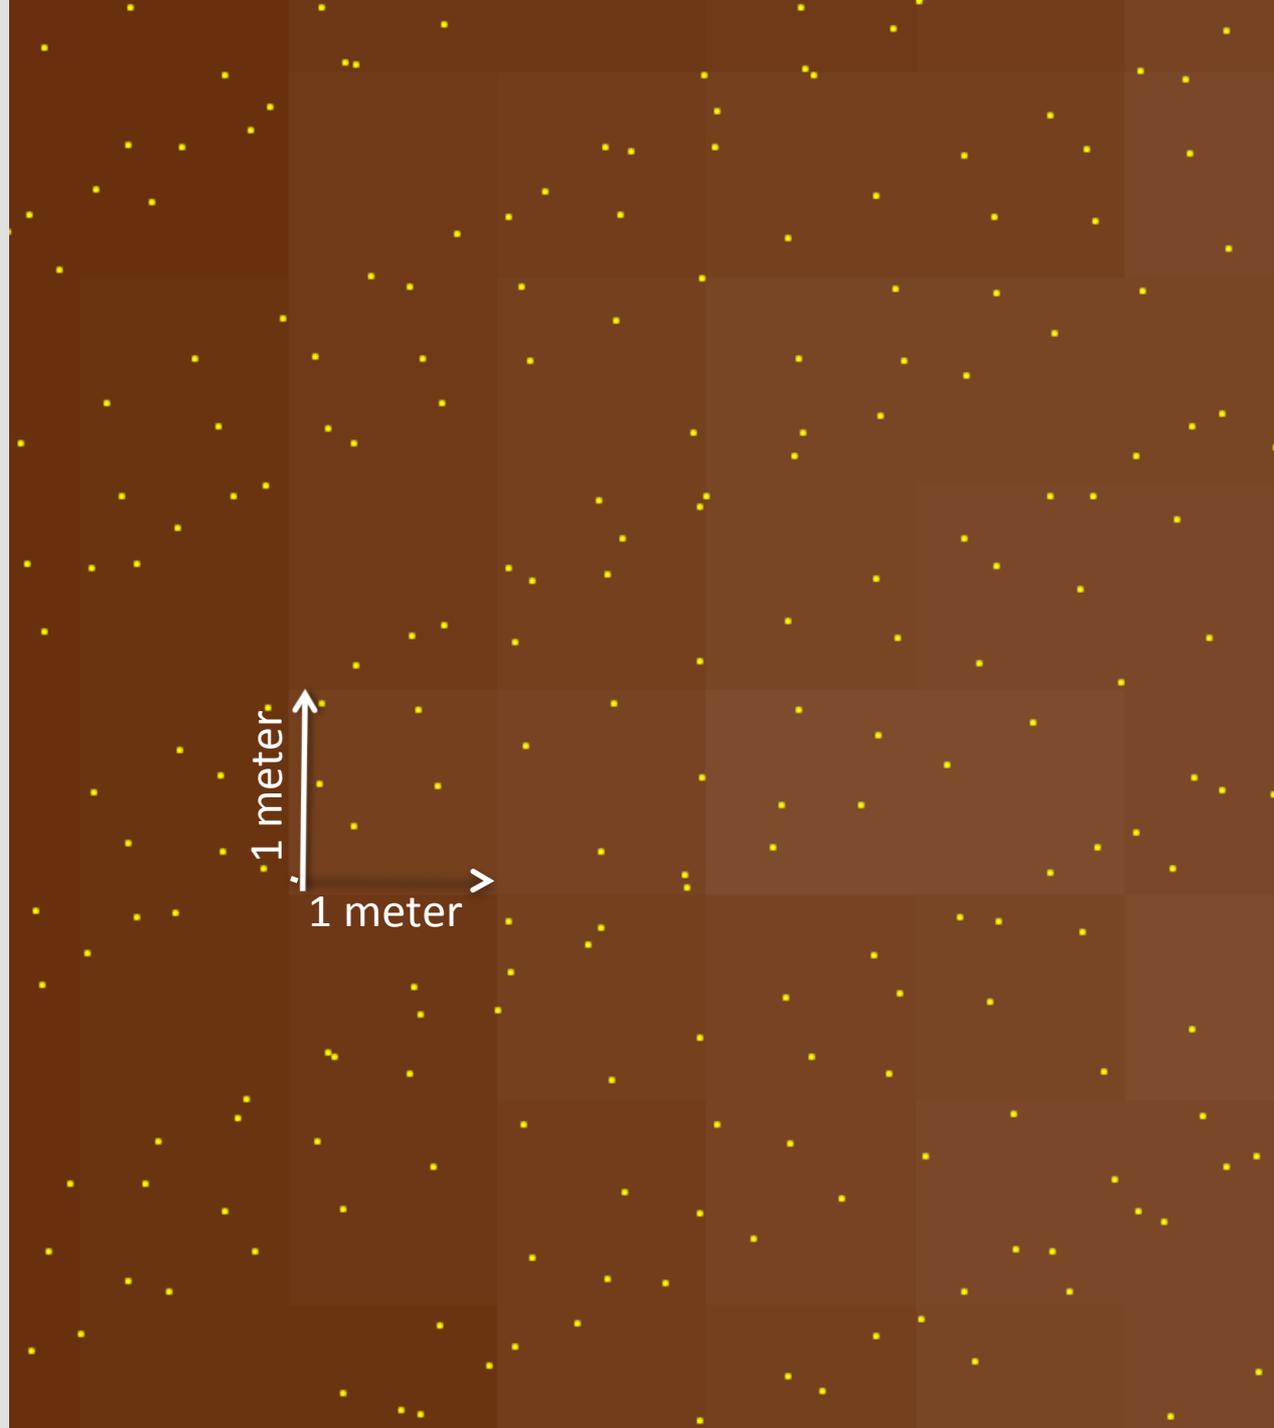


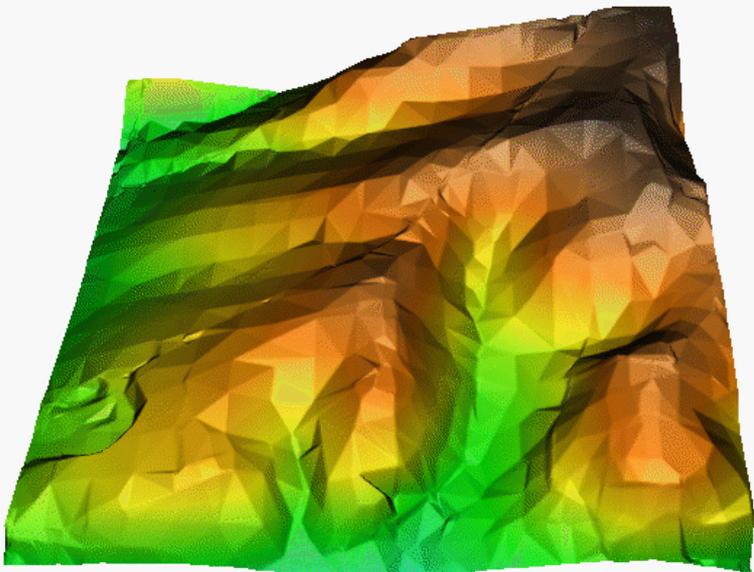


Triangulated Irregular Network (TIN)

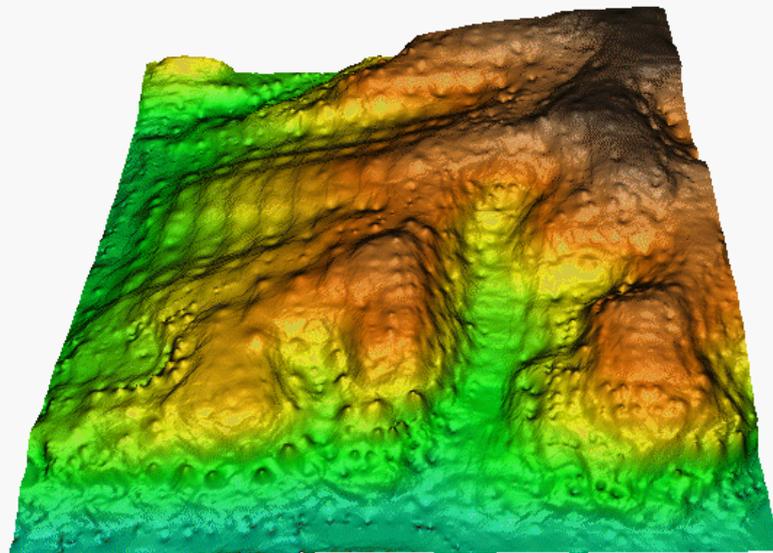

Inverse Distance Weighted (IDW)

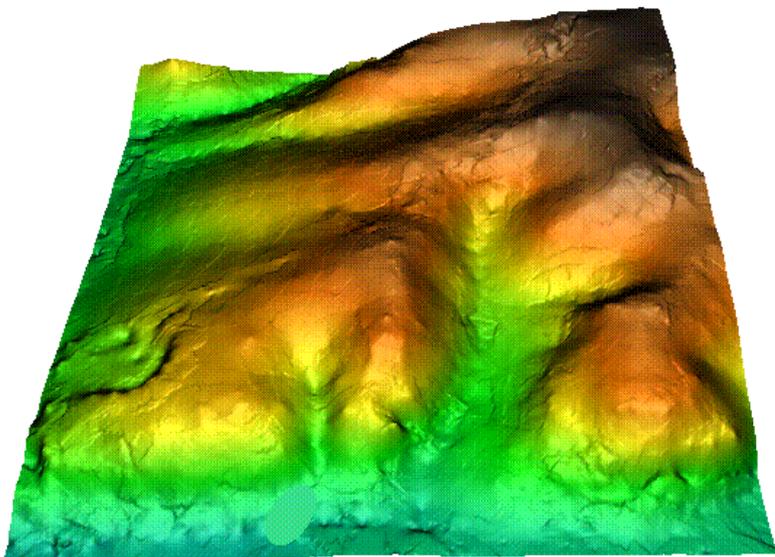


Kriging

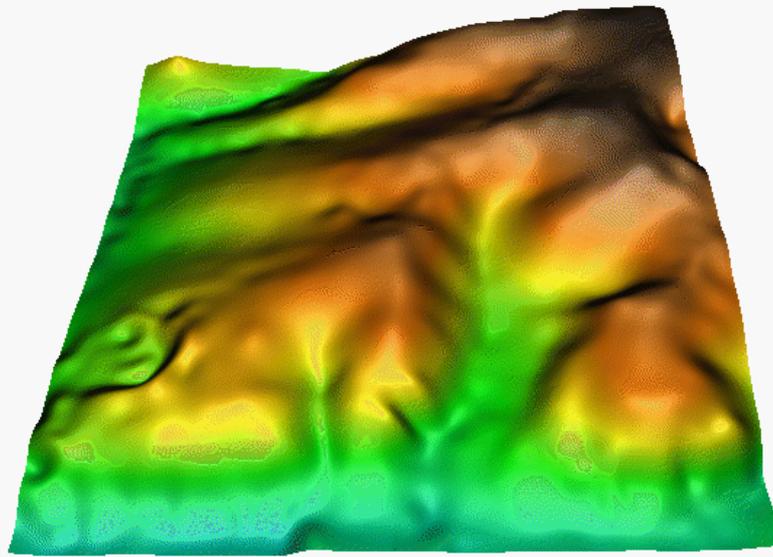

Regularized Spline with Tension and smoothing (RST)


Challenges & Approaches:

- Massive volume of point cloud data that need to be gridded presents unique challenge to many traditional GIS interpolation approaches.
 - Computation time becomes a serious concern
- Global vs Local fit
 - Global fit uses elevations from the whole map area to estimate unknown elevation at the grid node.
 - Ex: Kriging, Trend Surface Analysis, splines
 - Computationally intensive and require segmentation approaches to break input data into pieces which can be processed independently.
 - Often inexact interpolators
 - Surface does not exactly fit all points.
 - Works well in areas where ground is poorly sampled.

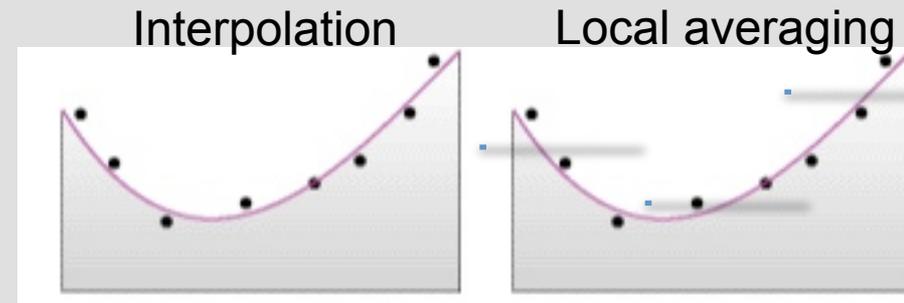

Challenges & Approaches II:

- Triangular Irregular Networks (TIN)
 - Constructed by triangulating a set of points

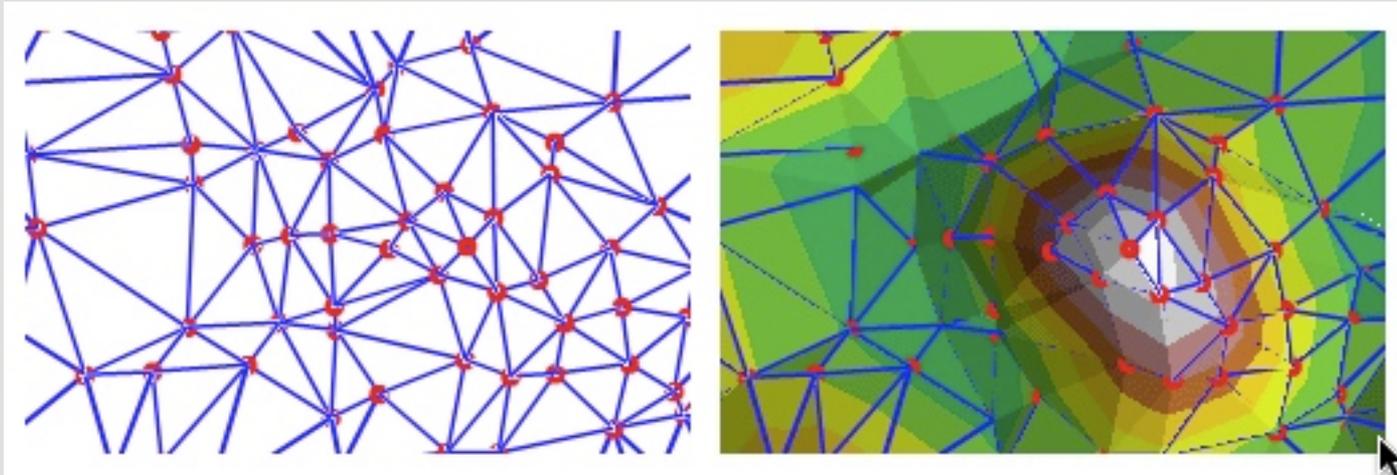


<http://webhelp.esri.com/>


- Linear interpolation where points are fit exactly
- Computationally efficient
- Preserve heterogeneity of detail in sampling
- Vector-based format so conversion to grid is necessary for many types of analysis.

Challenges & Approaches III:

- Global vs Local fit cont.:
 - Local fit only uses elevations immediately surrounding the grid node to estimate elevation.
 - Nearest neighbor, local binning, moving window
 - For all points that fall within the defined search area, apply mathematical function e.g Z_{mean} Z_{min} Z_{max} Z_{idw}
 - Computationally efficient
 - Not interpolation!
 - Works well when:
Sampling density > grid resolution
- Ex: sampling density = 5 shots/m²
grid resolution = 1 m

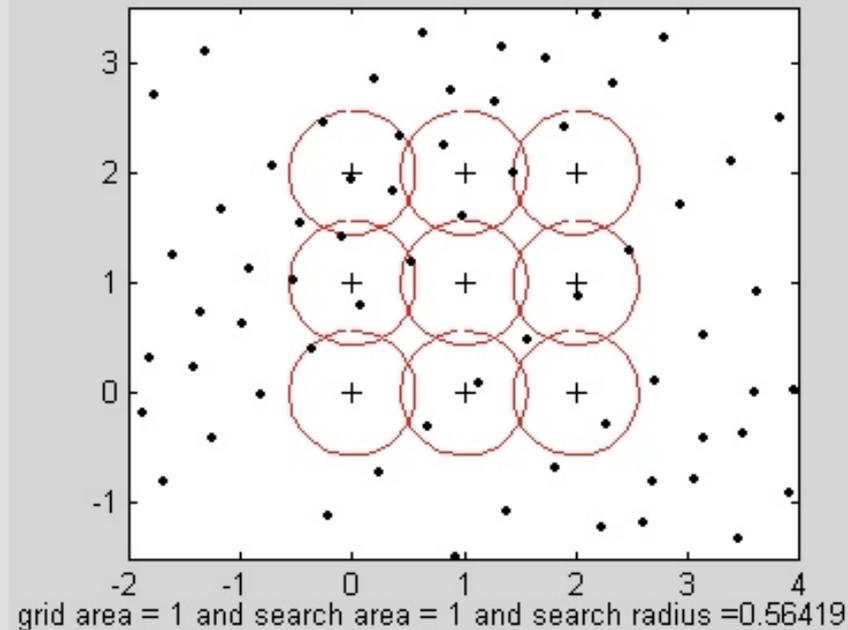


Search radius = grid resolution * sqrt(2)

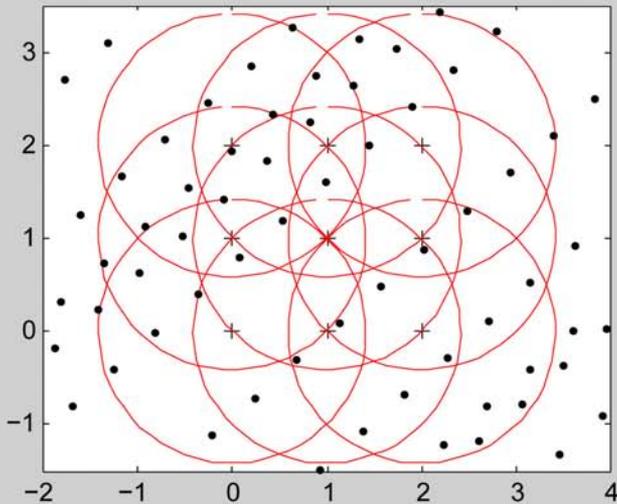


grid area = 1 and search area = 6.2832 and search radius = 1.4142

Search radius = grid resolution

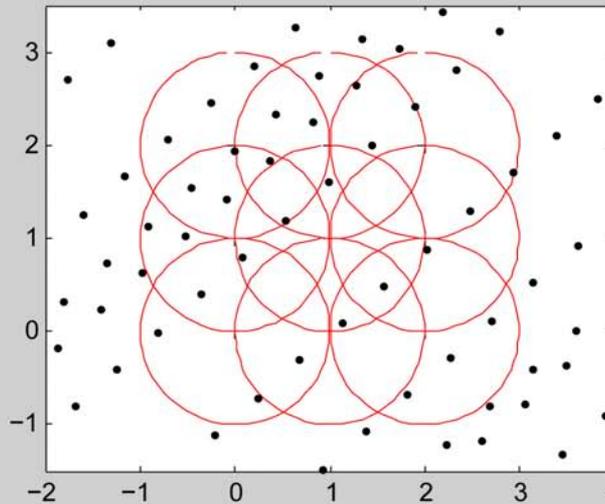


grid area = 1 and search area = 3.1416 and search radius = 1

Search radius = grid resolution * sqrt(2) / 2

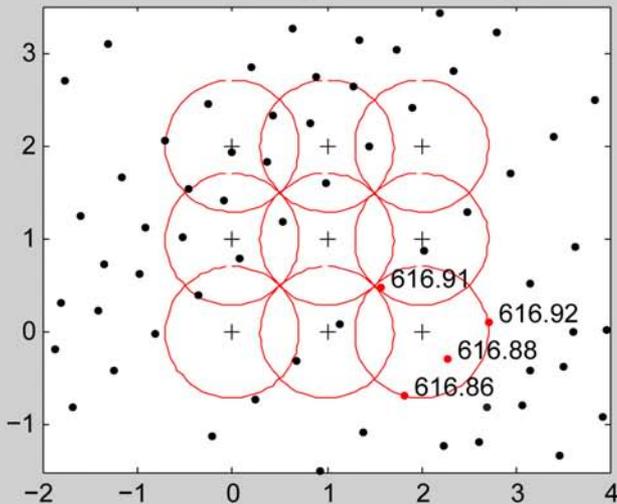

grid area = 1 and search area = 1.5708 and search radius = 0.70711

Search areas constant

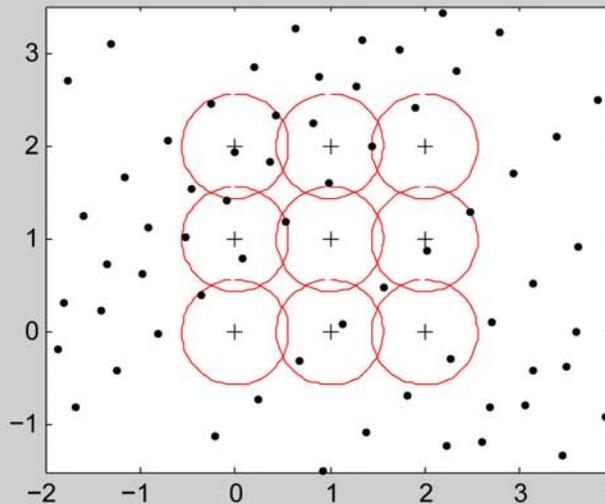

grid area = 1 and search area = 1 and search radius = 0.56419

For each search area, calculate:

Z_{mean}

Z_{min}

Z_{max}

Z_{idw}

Z_{den}

Z_{max}

Z_{min}

Shots/3.14 sq meters


High : 143





Low : 1

Z_{den}


Z_{idw}

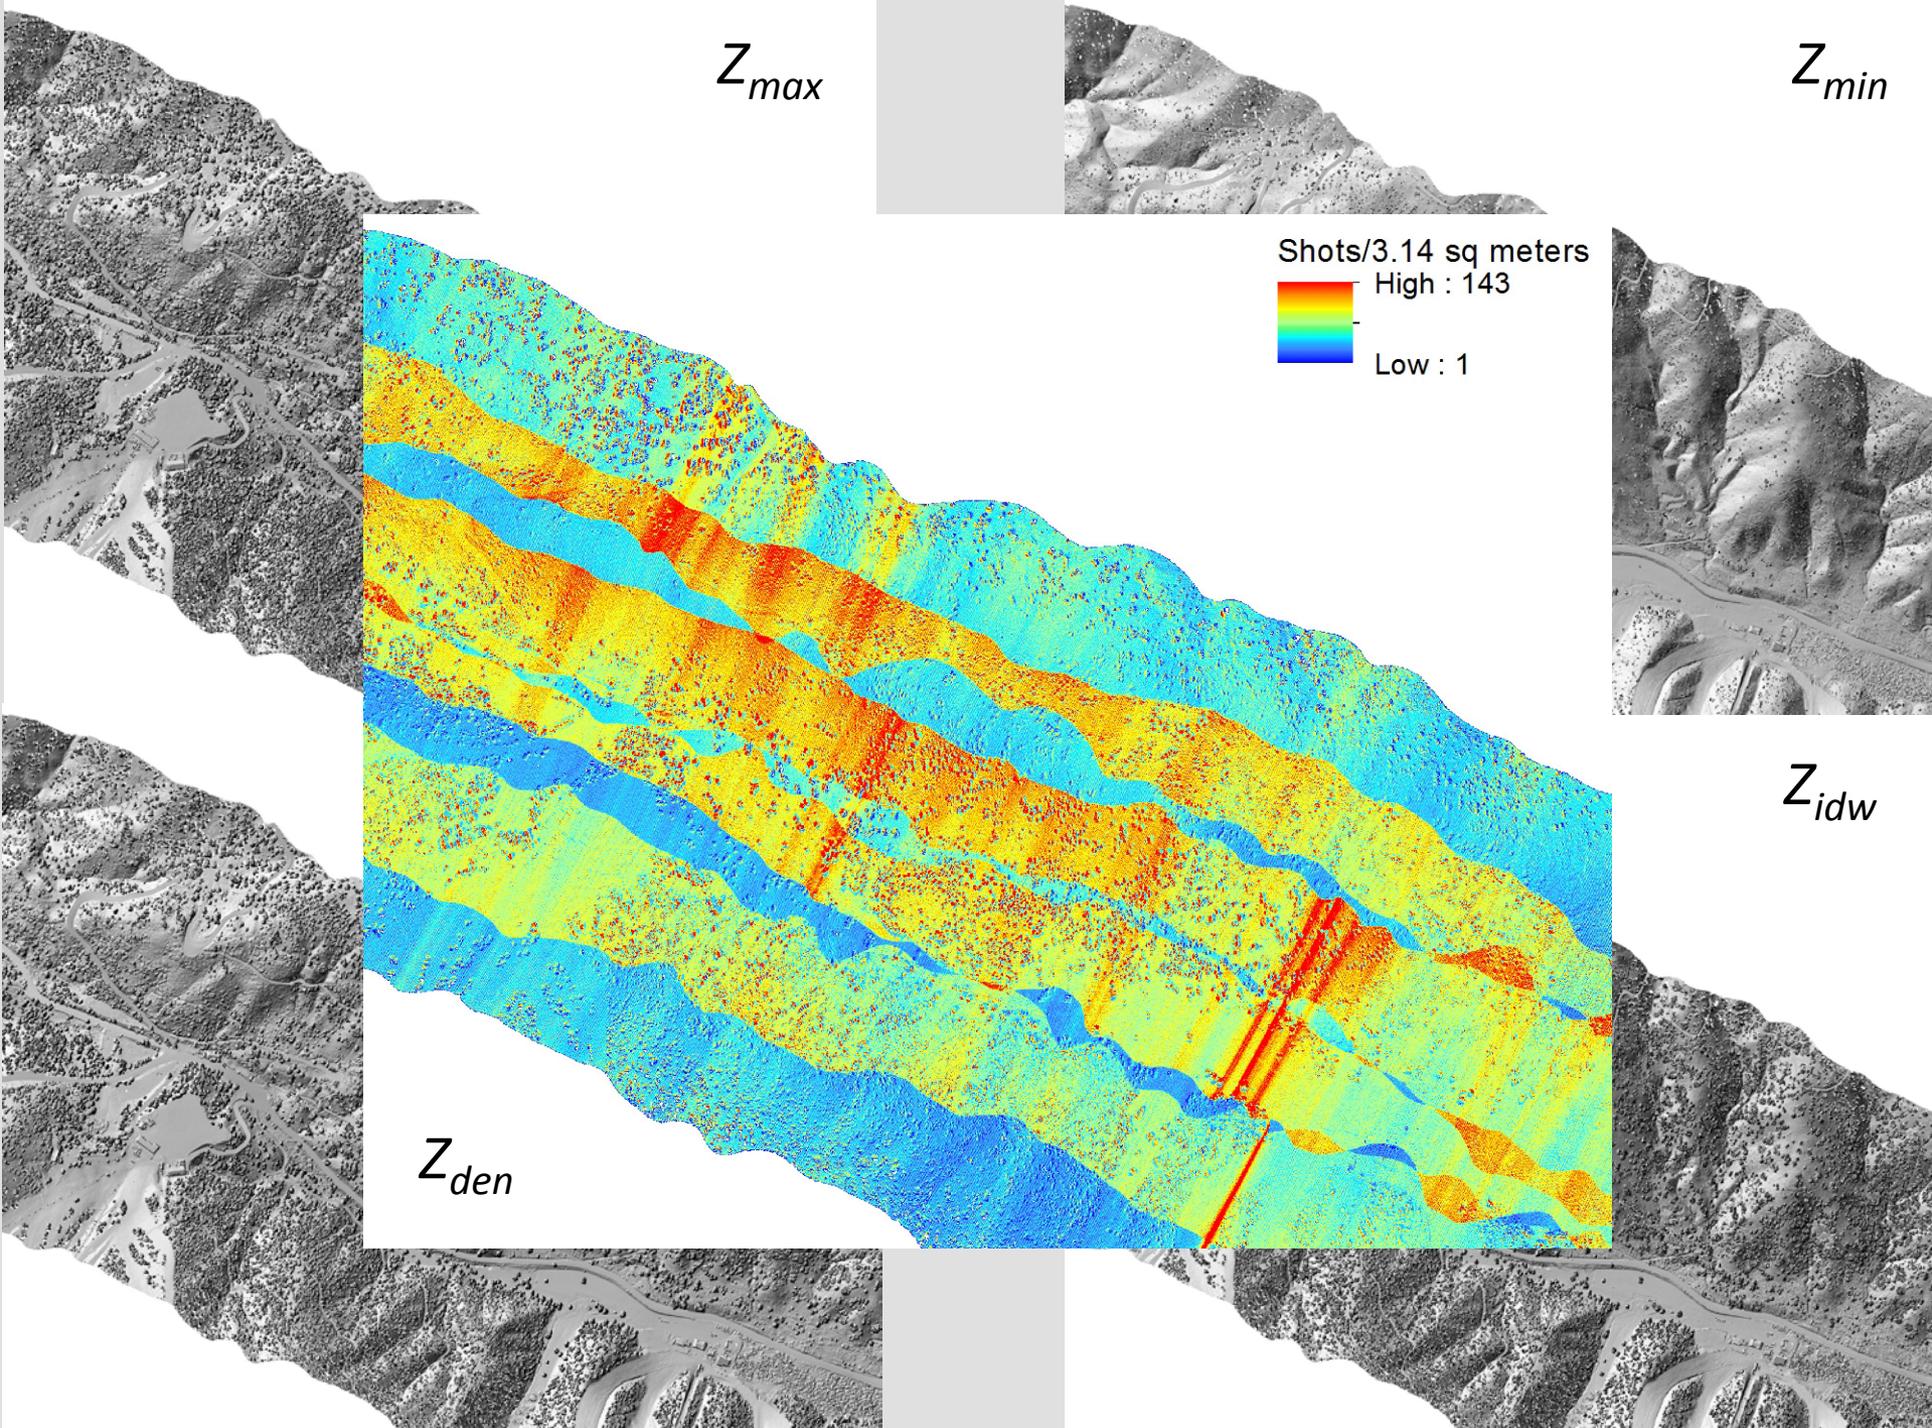

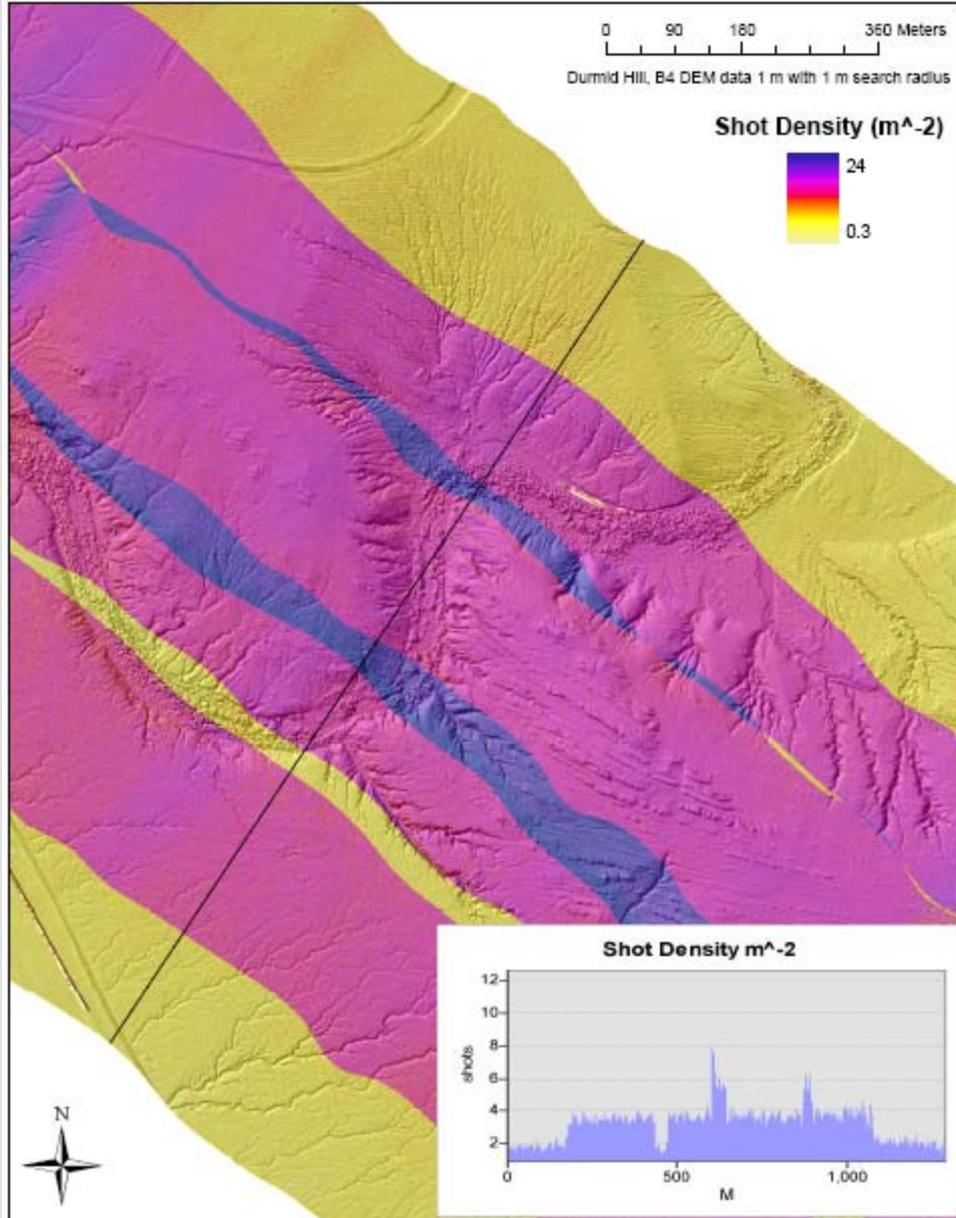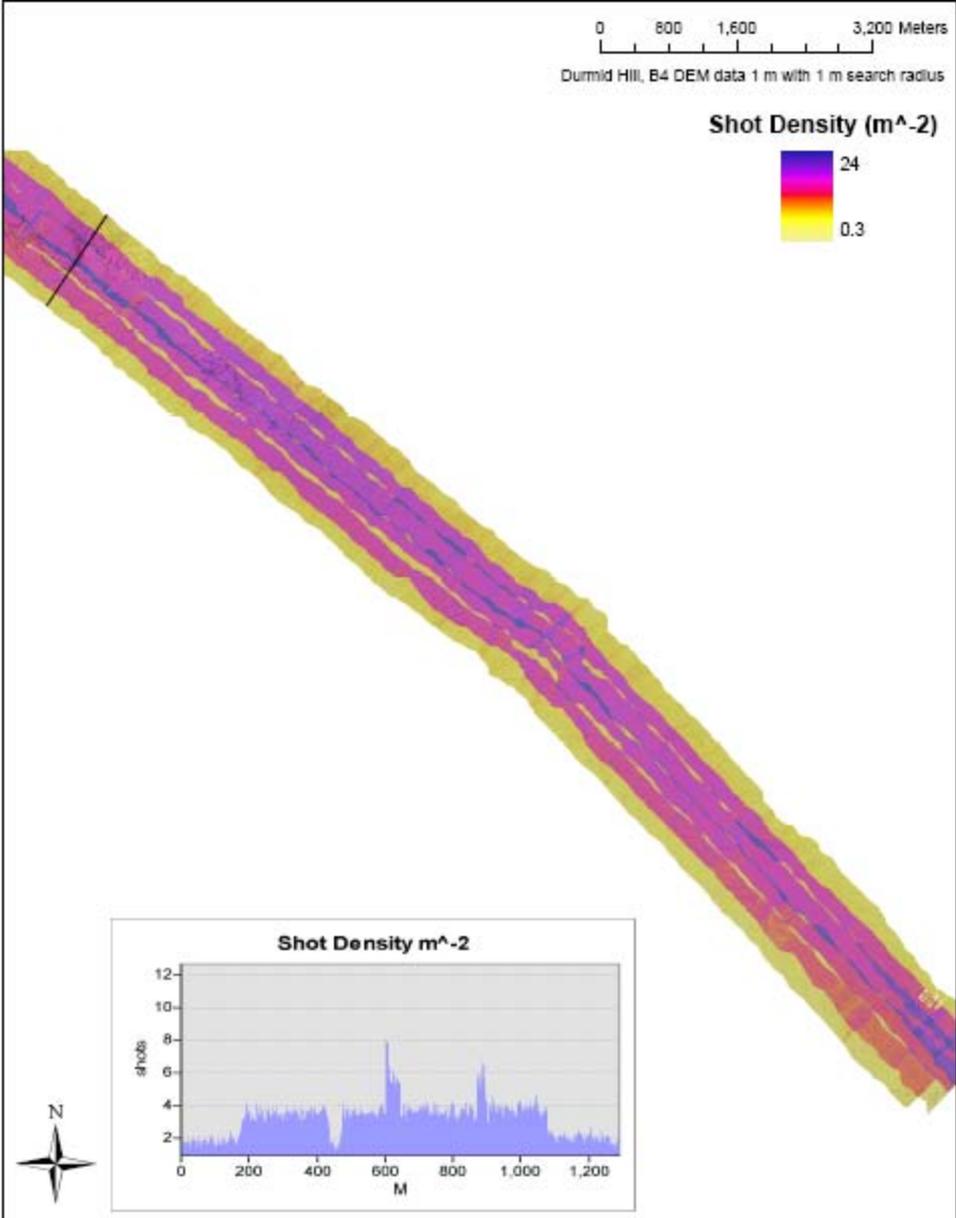


Heterogeneity of surface sampling: B4 shot density maps and profiles


A. Shot Density

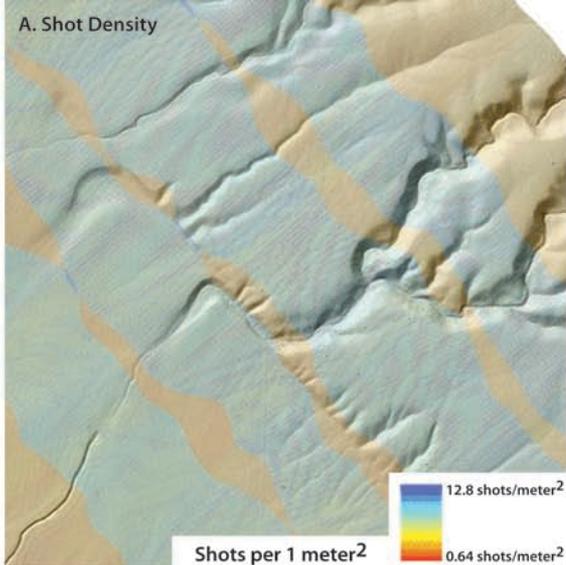


B. 1 Meter DEM, 0.707 Meter Search Radius

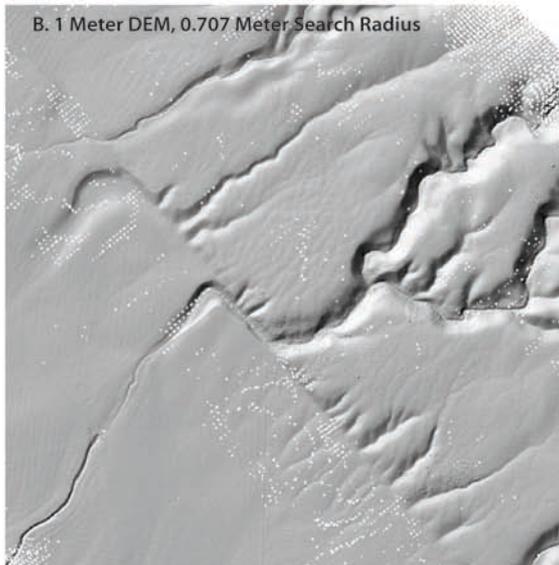


C. 1 Meter DEM, 1 Meter Search Radius

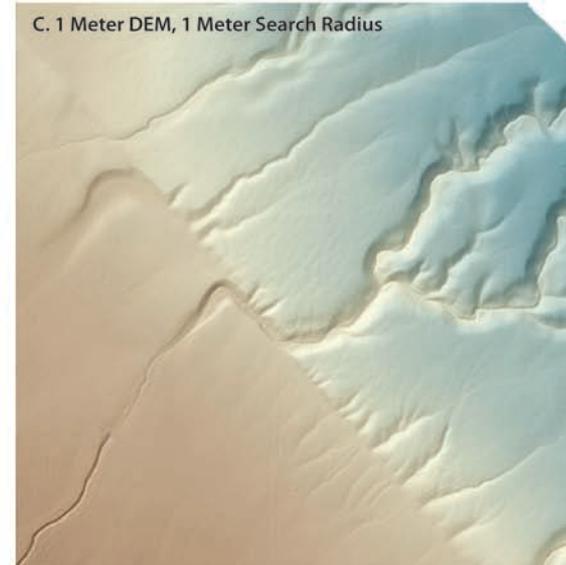




D. 0.5 Meter DEM, 0.353 Meter Search Radius

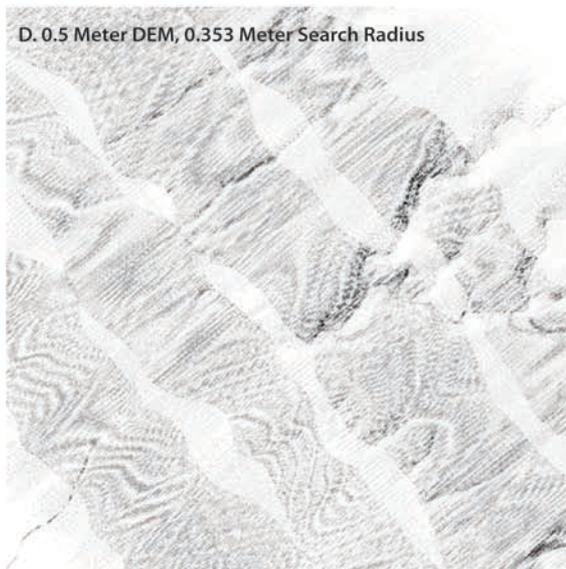


E. 0.5 Meter DEM, 0.707 Meter Search Radius

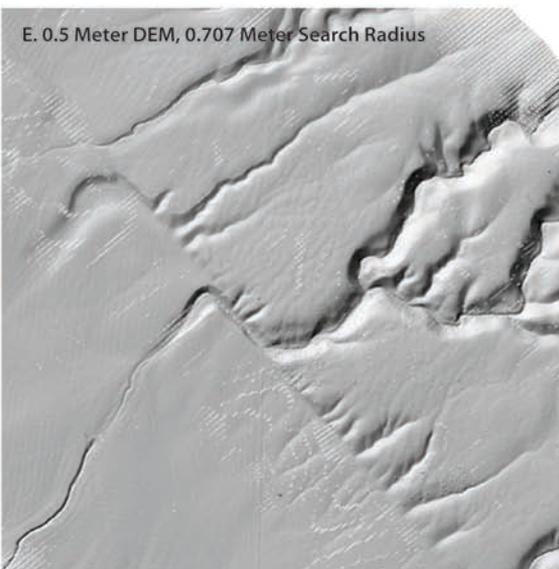


F. 0.5 Meter DEM, 1 Meter Search Radius

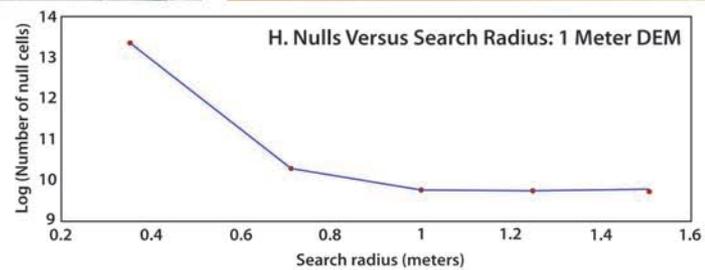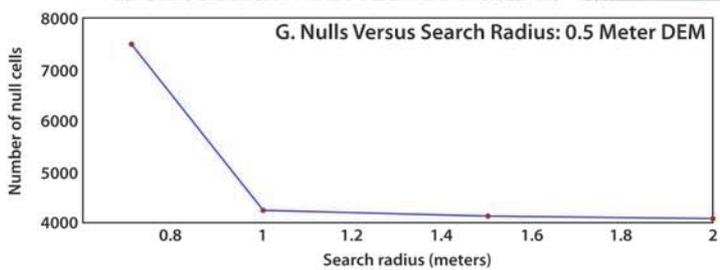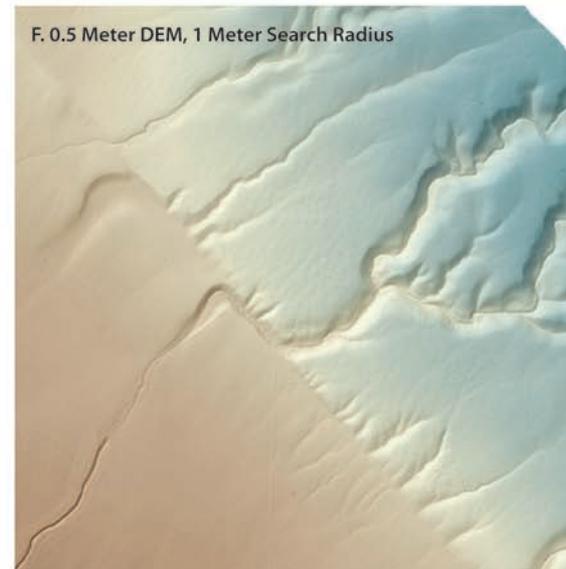

1m first return surface hillshade

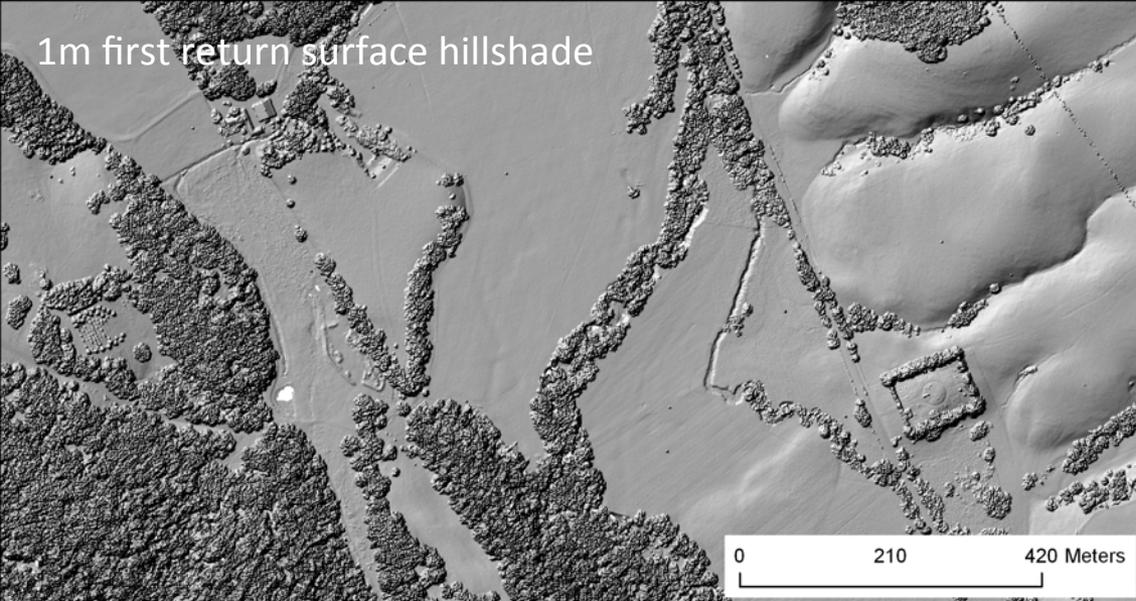


Importance of ground return density & DEM resolution

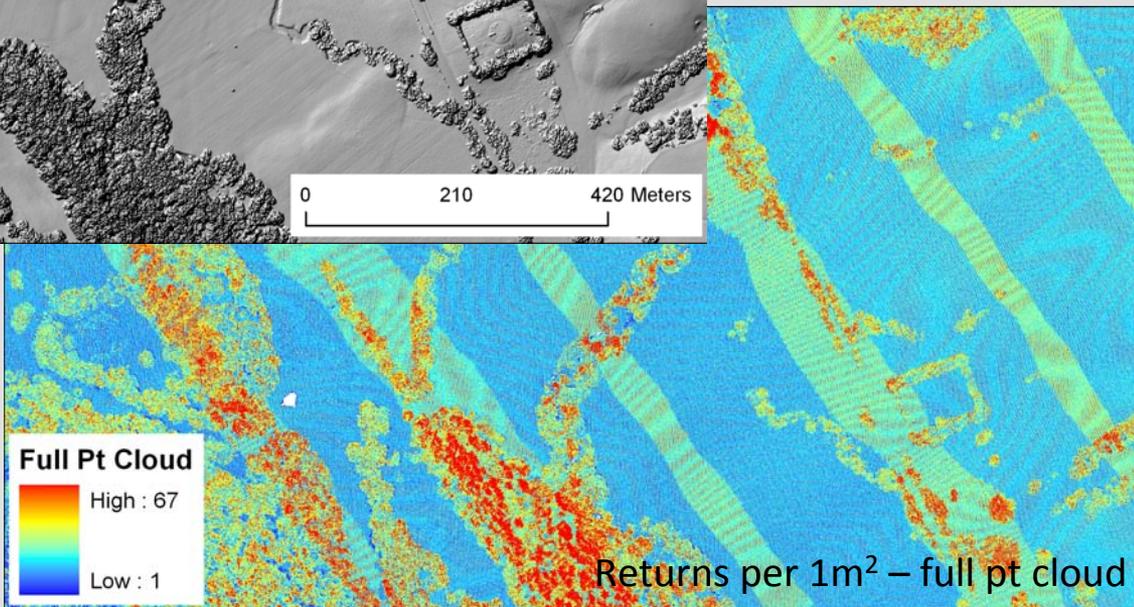





Returns per 1m² – full pt cloud


Ground return density may dictate appropriate DEM generation approach.

TIN or other non-local interpolator necessary in areas of sparse ground returns (right).

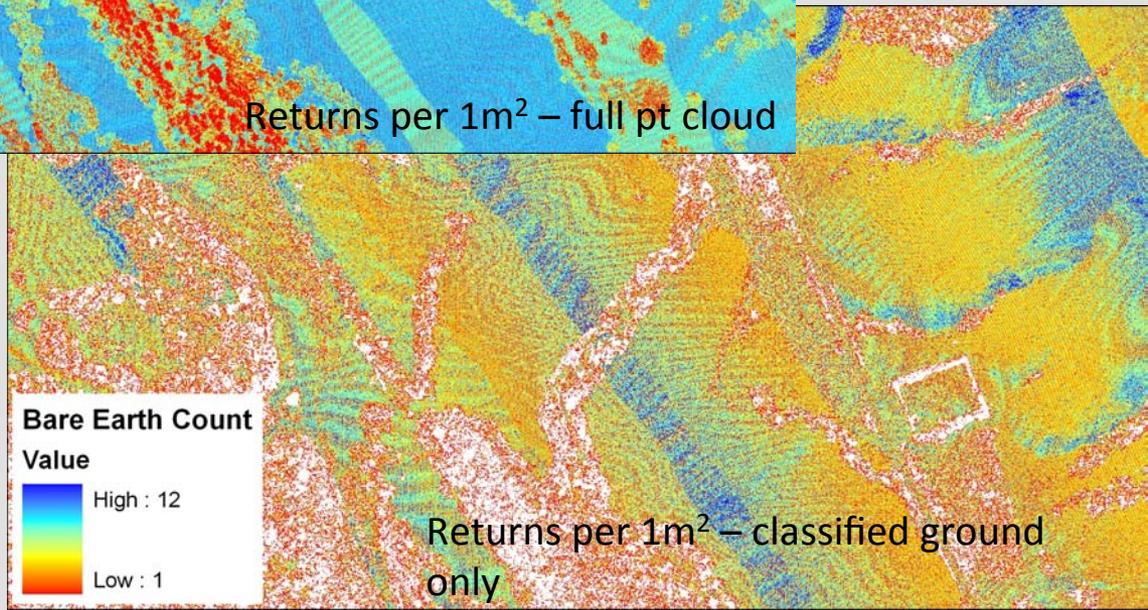

Returns per 1m² – classified ground only

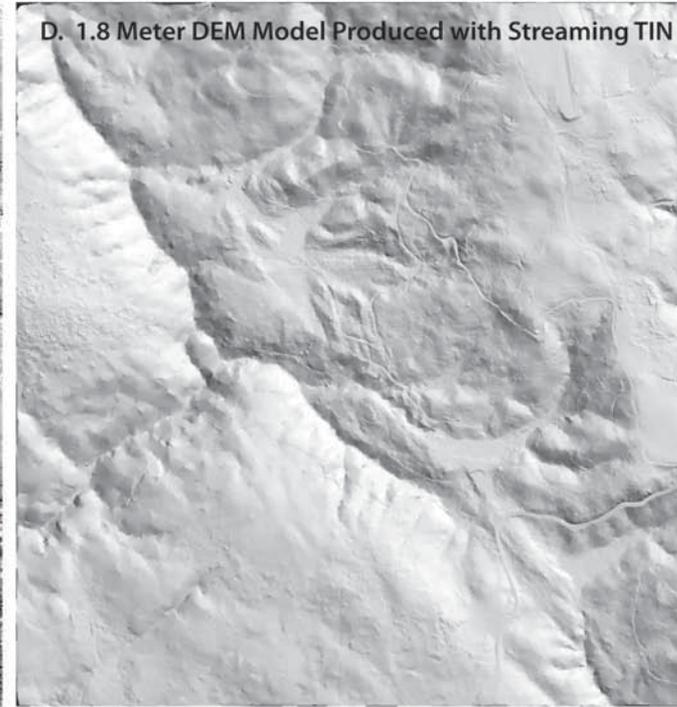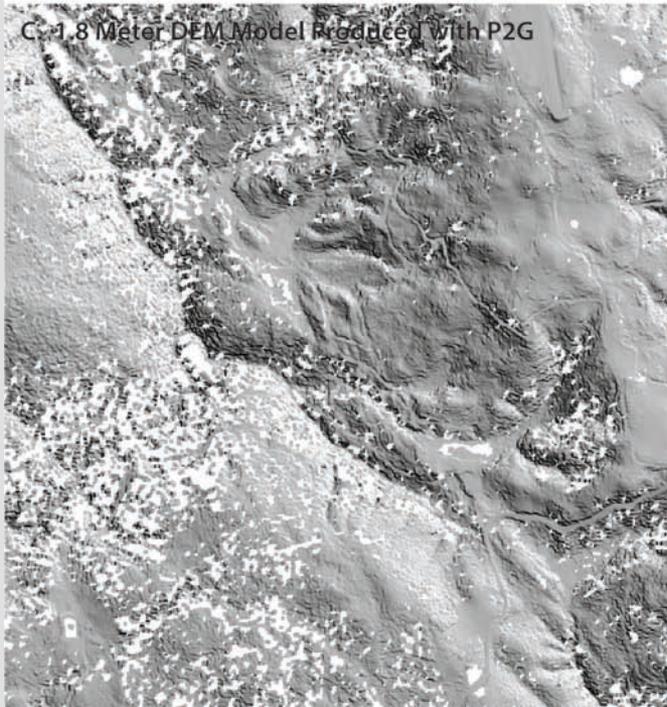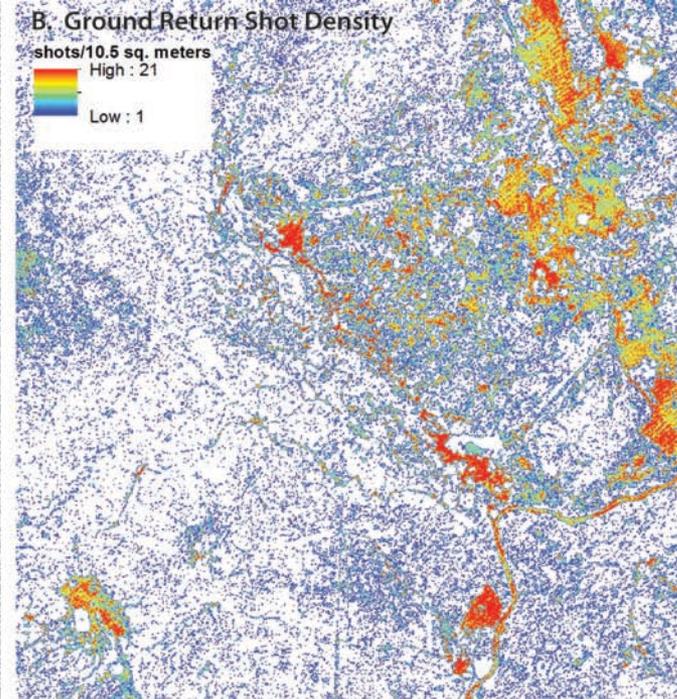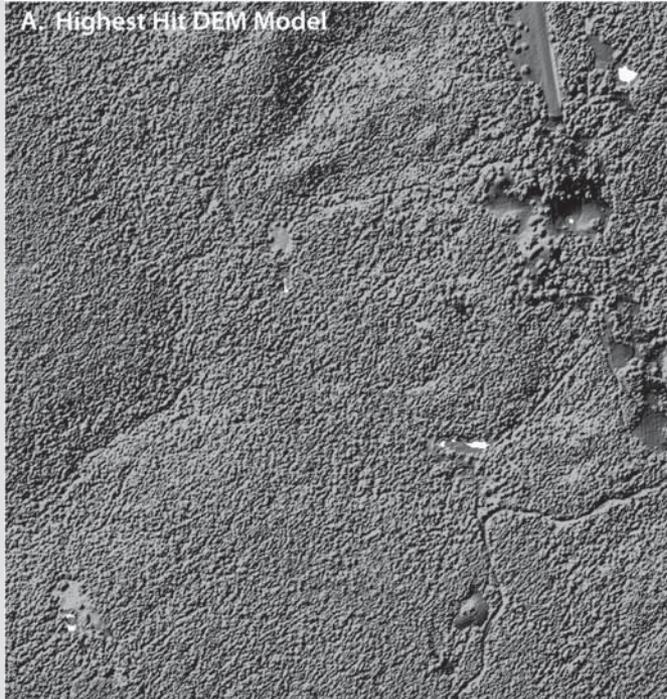


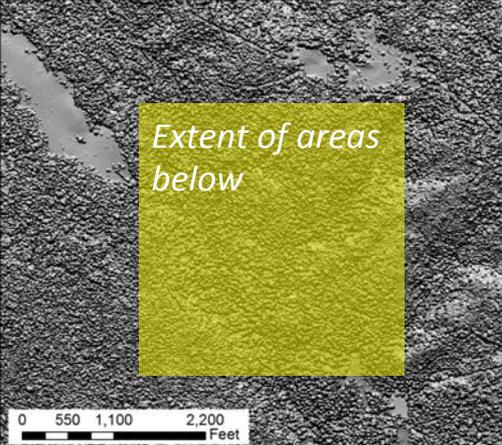


Role of gridding method in areas of low return density:

Do you prefer visible artifacts or smoothed regions where surface is less well constrained?

- Local methods can populate pixels without returns to null (swiss cheese surface – very honest representation of data)
- TIN artifacts in low ground return density
- Spline and Kriging = smoother surface...low return density less clear

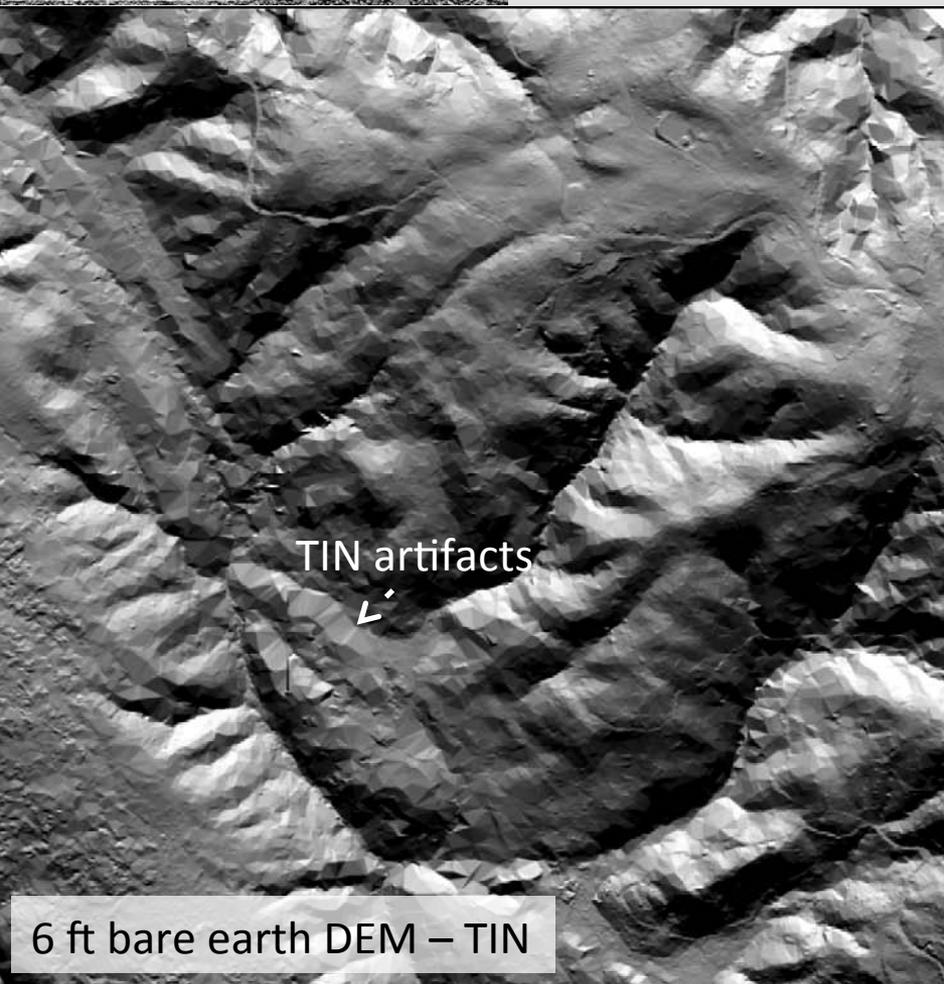

6 ft bare earth DEM – TIN

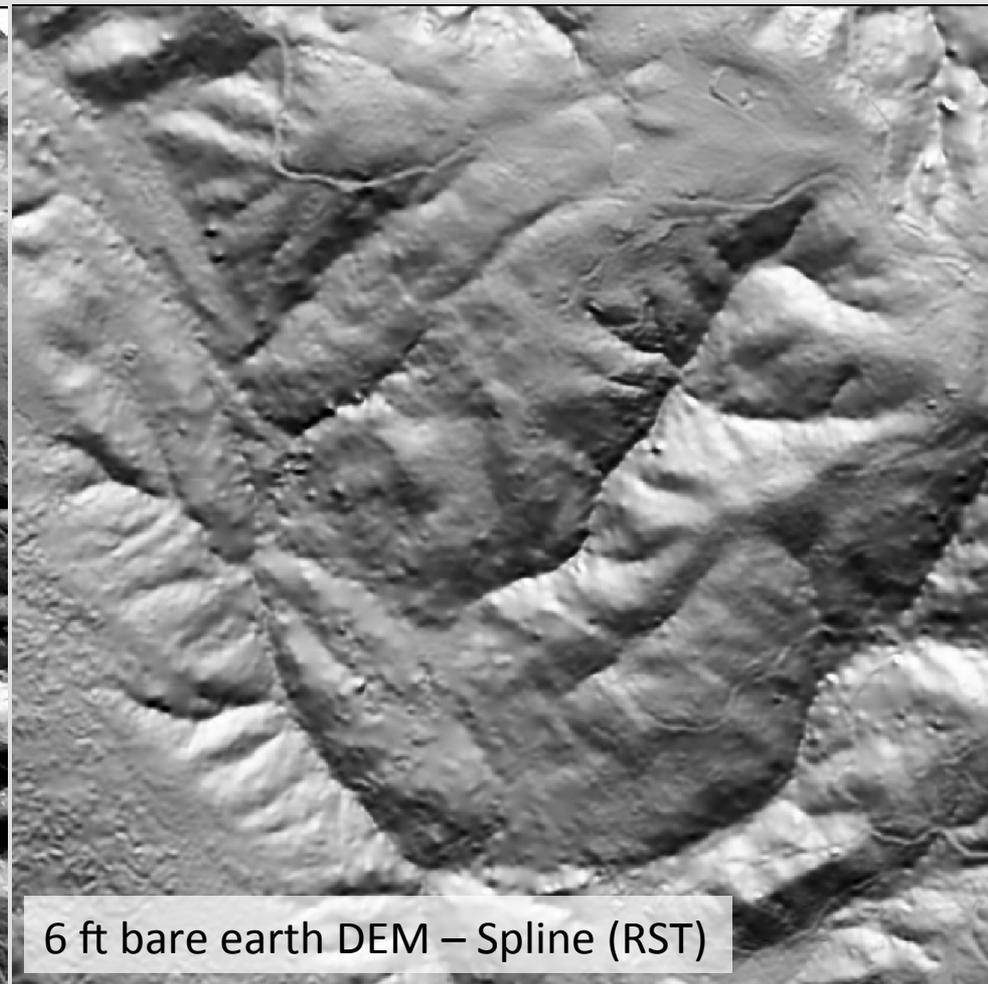

6 ft bare earth DEM – Spline (RST)

Other Considerations:

- Application of data:
 - Different applications may warrant different approaches to grid generation
 - e.g. Hydrologic routing vs. geomorphic mapping
- Software and computational resources available

SUMMARY (rules of thumb...):

- In general for LiDAR data, return density is $>$ than grid resolution (i.e. multiple returns per meter)
 - In this case, local gridding approaches can produce accurate DEMs and are computationally efficient.
- When the ground is poorly sampled (typically in areas of dense vegetation and steep topography), it may be necessary to use an interpolation approach such as spline or kriging to fit a surface to fill the gaps and produce a continuous terrain model.
- TINs generally work well in all return densities unless facet artifacts are a problem.
- LiDAR Return densities are very heterogeneous & and it is important to understand your data before beginning to work with them.